



SEINFLEX

VOICE COIL MOTOR & VOICE COIL MOTOR STAGE SFMV-L54-S10-F20 / SFSV-L54-S10-F20

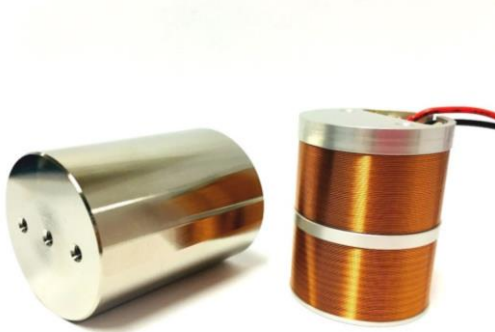


<VOICE COIL MOTOR : SFMV-L54-S10-F20>

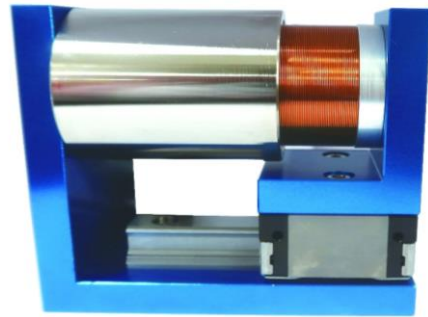

<VOICE COIL MOTOR STAGE : SFSV-L54-S10-F20>

Specification	Spec.
DC RESISTANCE	6.8 Ohms
VOLTAGE	24 Volts
CURRENT	4 Amps
FORCE SENSITIVITY	17.5 N/A
BACK EMF CONSTANT	17.5 V/M/Sec
INDUCTANCE	1.88 mH
PEAK FORCE	73 N
CONTINUOUS FORCE	24 N
CONTINUOUS FORCE WITH HEAT SINK	-
POWER	110 W
Usable STROKE	10 mm
CLEARANCE ON SIDE OF COIL	0.37 mm
THERMAL RESISTANCE	-
MAX WINDING TEMP	Over 200 °C
WEIGHT OF ACTUATOR	Approximate 600g
OUTSIDE DIAMETER	44.9 mm
HOUSING LENGTH	54 mm
FRAME SIZE	57 × 100 × 88 mm

<Dimension : SFMV-L54-S10-F20>

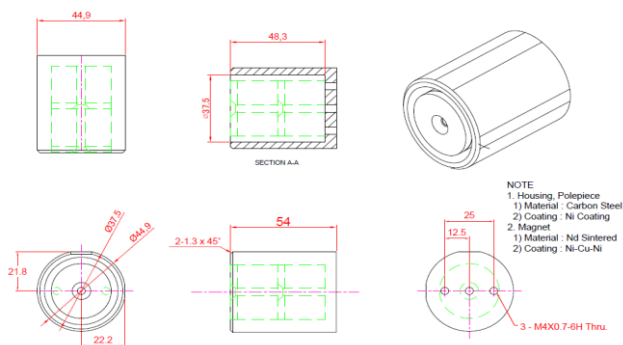

<Dimension : SFSV-L54-S10-F20>

