






Model	EFFECTIVE CAPACITY	(EMULSIFY)		(AGITATOR)		(OUTSIDE DIMENSION)				THE MERIT RATE (KW)
		KW	min/r	KW	min/r	(LENGTH)	(WIDTH)	(HEIGHT)	(MAX H)	
TFZRJ-20	20	2.2	0-3500	0.37	10-70	1800	1600	1850	2700	8.57
TFZRJ-50	50	3	0-3500	0.75	10-70	2700	2000	2015	2700	8
TFZRJ-100	100	3	0-3500	1.5	10-70	2920	2120	2200	3000	11
TFZRJ-150	150	4	0-3500	1.5	10-70	3110	2120	2200	3100	11
TFZRJ-200	200	5.5	0-3500	1.5	10-70	3150	2200	2200	3100	12
TFZRJ-350	350	7.5	0-3500	2.2	10-70	3650	2650	2550	3600	15.75
TFZRJ-500	500	7.5	0-3500	2.2	10-70	3970	2800	2700	3950	21.5
TFZRJ-750	750	11	0-3500	4	10-70	3780	3200	3050	4380	25
TFZRJ-1000	1000	11	0-3500	4	10-70	3900	3400	3150	4550	25
TFZRJ-2000	2000	15	0-3500	7.5	10-70	4850	4300	3600	不帶升降	33.5



5ℓ용 실험실 유화기



20ℓ 소형 유화기

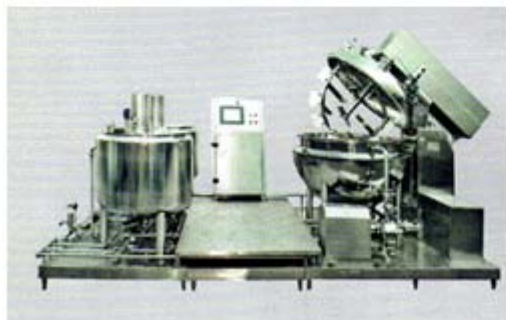

수용식 유화기



2000ℓ ~ 5000ℓ용 진공 유화기



좌약용 진공 유화기

Model	EFFECTIVE CAPACITY	(EMULSIFY)		(AGITATOR)		(OUTSIDE DIMENSION)				THE MERIT RATE (KW)
		KW	min/r	KW	min/r	(LENGTH)	(WIDTH)	(HEIGHT)	(MAX H)	
TFSRJ-100	100	3	0-1700	1.5	10-70	2400	2360	2200	2800	10.5
TFSRJ-150	150	4	0-1700	1.5	10-70	2450	2375	2200	2900	11.5
TFSRJ-200	200	4	0-1700	1.5	10-70	2500	2380	2200	2900	11.5
TFSRJ-350	350	5.5	0-1700	2.2	10-70	2800	2600	2550	3400	16
TFSRJ-500	500	5.5	0-1700	2.2	10-70	3700	3500	2600	3500	19.5

VACCUM AGI HOMO MIXER STANDARD TABLE

