


TYPICAL TYPE

- 2 POST CAR LIFT

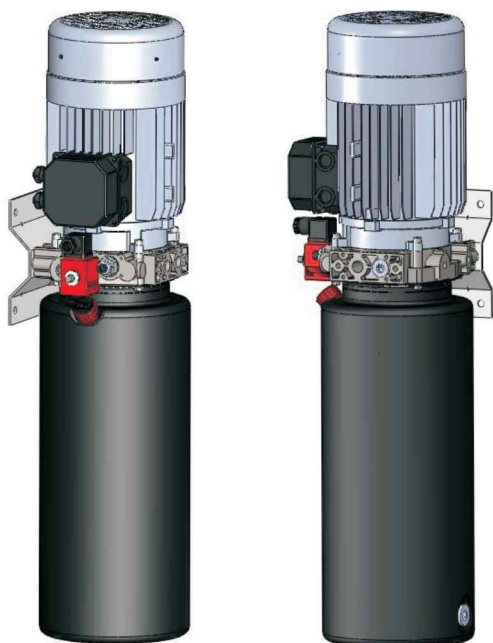


Description

Designed for smaller, low-rise auto hoist & can be mounted either horizontally or vertically.

A push button on the motor starts the unit to raise the vehicle on the lift.

To lower, a manually operated cartridge-style release valve is used for finger-tip control of lowering speed.

Power Pack for *2 POST CAR LIFT*

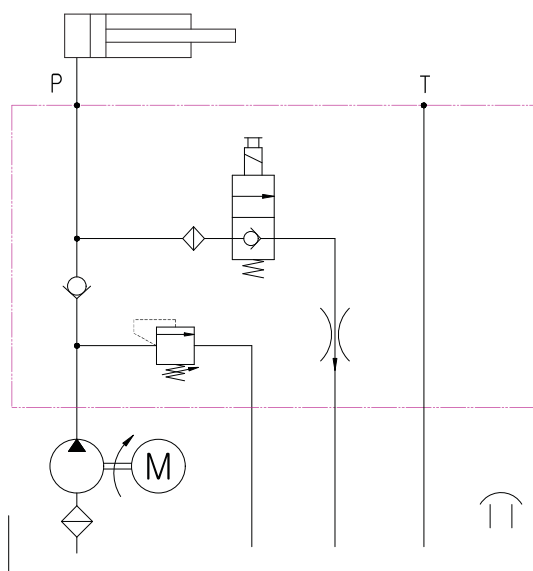

Hydraulic Circuit




Application - *2 POST CAR LIFT*


Hydraulic oil specification

Type : Mineral based hydraulic oil (HM or HV)

Viscosity : ISO VG22 to 46 (Ambient > 0°C) ISO VG15 (Ambient < 0°C)

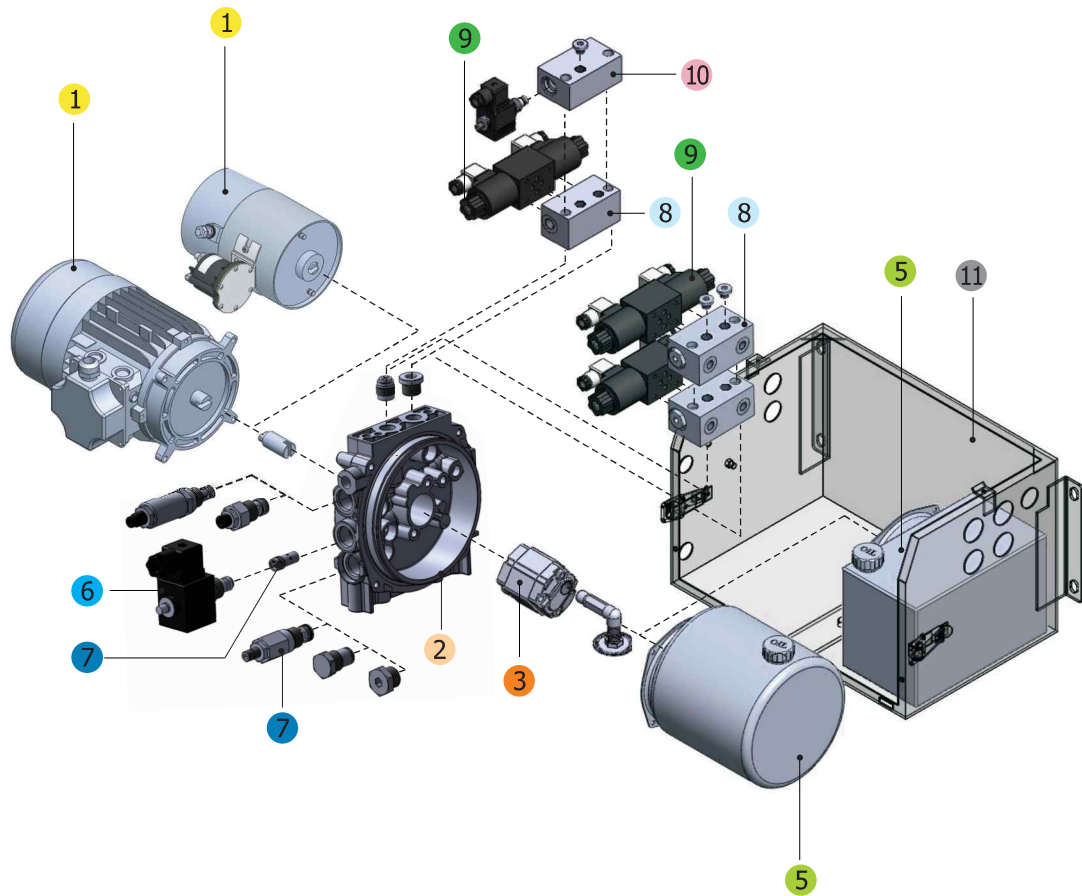

One single acting & one double acting

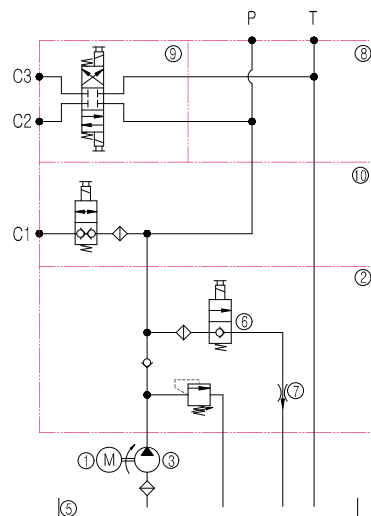

Two double acting

