Envir+ En

Oil Vapor Recovery Unit



Hanyoung Technochem Co., Ltd

Gas Stations Oil Vapor Recovery Unit

Gas Stations Oil Vapor Recovery Unit P&I

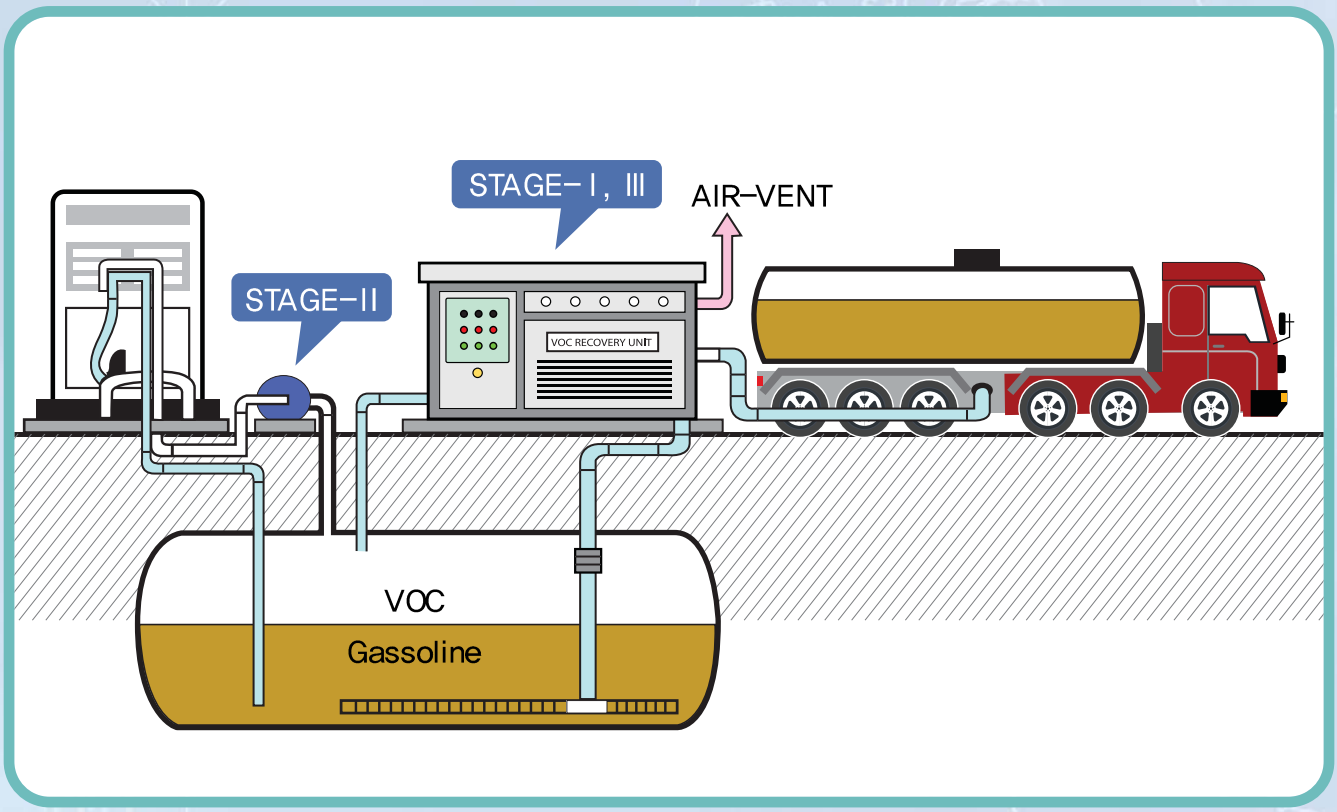



Gas Stations Oil Vapor Recovery Unit

Explosion Proof Type



SpeC.

Discription	Gas Stations Oil Vapor Recovery Unit (Explosion Proof)
Model	HYROV-75RP-EXP
Flow	30L~35L(32000L Unloading)
Power	7.5HP
Size	1350L×760L×1250H

Normal Type



SpeC.

Discription	Gas Stations Oil Vapor Recovery Unit
Model	HYROV-75RP
Flow	30L~35L(32000L Unloading)
Power	7.5HP
Size	1350L×760L×1250H

Industrial Oil Vapor Recovery Unit

Cooling Condensation Type



SpeC.

Discription	Industrial Oil Vapor Recovery Unit
Model	HYROV-R50-EXP
Flow	400ℓ /min
D. Tem.	-30℃
Power	5HP(Freezing)
Size	1200L×700W×1100H
Purpose	For a single VOC recovery

Compressed Cooling Condensation Type



SpeC.

Discription	Industrial Oil Vapor Recovery Unit
Model	HYROV-CR50-EXP
Flow	400ℓ /min
D. Tem.	-30℃
Power	5HP(Freezing)/7.5HP(Compressor)
Size	1200L×700W×1100H
Purpose	For Mixed VOC recovery

Mixed Type



SpeC.

Discription	Industrial Oil Vapor Recovery Unit
Model	HYROV-M50-EXP
Flow	400ℓ /min
D. Tem.	-30℃
Power	5HP
Size	1200L×700W×1100H
Purpose	High-efficiency mixed gas recovery (Under 200 ppm)

Industrial Oil Vapor Recovery Unit

Industrial Oil Vapor Recovery Unit

Vapor Recovery System

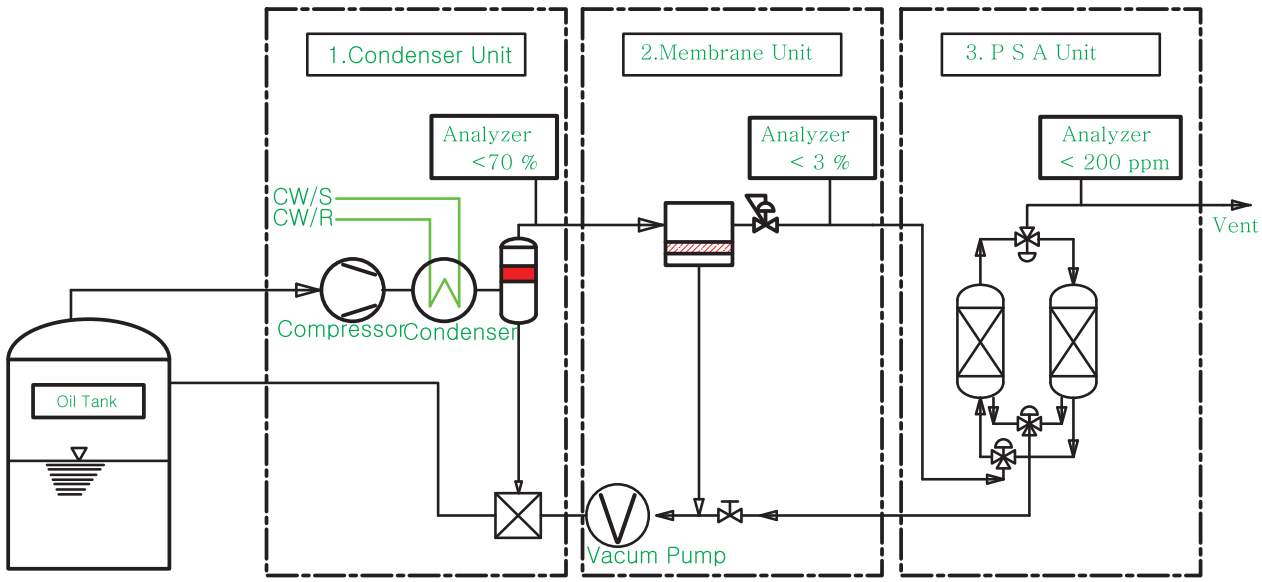





Hanyoung Technochem Co., Ltd

COMPANY 37-19, Techno saneop-ro 55beon-gil, Nam-gu, Ulsan, Republic of Korea
Tel : +82-52-918-6050 Fax : +82-0504-402-6050
FACTORY 90, Moseobyeolbong-gil, Cheonbuk-myeon, Gyeongju-Si, Gyeongsangbuk-do, Republic of Korea
Tel : +82-54-763-6050 Fax : +82-54-763-6052
E-mail. hygg@chol.com
www.technochem.co.kr